




Sterco

TRS & HOFR HOSES CONFORMING TO IS: 447

LIGHT WEIGHT HOSE PIPE CODE SWH.

- ★ HOFR (HEAT OIL FIRE & RETARDENT).
- ★ LONG LIFE OZONE RESISTANT COVER
60% WEIGHT COMPARED TO
CONVENTIONAL RUBBER HOSES.
- ★ HIGH BURSTING PRESSURE OF
80 KGF.
- ★ SUITABLE FOR COMPRESSORS &
PNEUMATIC APPLICATIONS ALSO.
- ★ UNCONDITIONAL GUARANTEE
FOR 12 MONTHS.

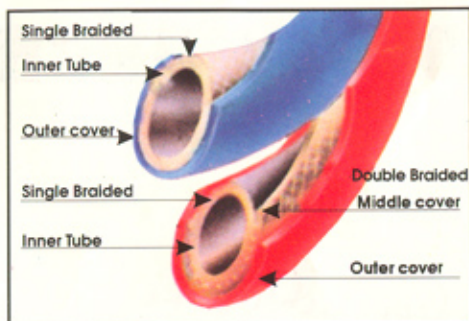

'STERCO' RUBBER WELDING HOSES CONFORMING TO IS : 447/1988 (SINGLE PLY)

Code No.	Nominal Inner Dia		Working Pressure		Bursting Pressure	
	M.M	Inches	N/MM ²	KGF/CM ²	N/MM ²	KGF/CM ²
SWI-1	5	3/16"	1.37	14	5.5	56
SWI-2	6.3	1/4"	1.37	14	5.5	56
SWI-3	8	5/16"	1.37	14	5.5	56
SWI-4	10	3/8"	1.37	14	5.5	56

'STERCO' RUBBER WELDING HOSE STANDARD QUALITY (SINGLE PLY)

SWS-1	5	3/16"	1	10.2	3	30.6
SWS-2	6.3	1/4"	1	10.2	3	30.6
SWS-3	8	5/16"	1	10.2	3	30.6
SWS-4	10	3/8"	1	10.2	3	30.6

'STERCO' RUBBER WELDING HOSE STANDARD QUALITY (DOUBLE PLY)

SWD-1	6.3	1/4"	1.37	14	5.5	56
SWD-2	8	5/16"	1.37	14	5.5	56
SWD-3	10	3/8"	1.37	14	5.5	56

Note: 1N/MM² ≈ 10.2 Kgf/CM² = 1KGF/CM² = 14.4 P.S.I
i.e. 1N/MM² = 147 P.S.I. App.

SWI RANGE (PLAIN HOSE) BLUE HOSE FOR OXYGEN
RED HOSE FOR D.A.

**SWS RANGE (CORRUGATED/
PLAIN HOSE)** BLACK HOSE FOR OXYGEN
RED HOSE FOR D.A.

SWD RANGE (PLAIN HOSE) BLUE/BLACK HOSE FOR OXYGEN
RED HOSE FOR D.A.